


P 17 Tempra Pro IP 44 - LV 16 and 32 A

sockets, plugs, mobile sockets, appliance inlets and interlocked switched sockets

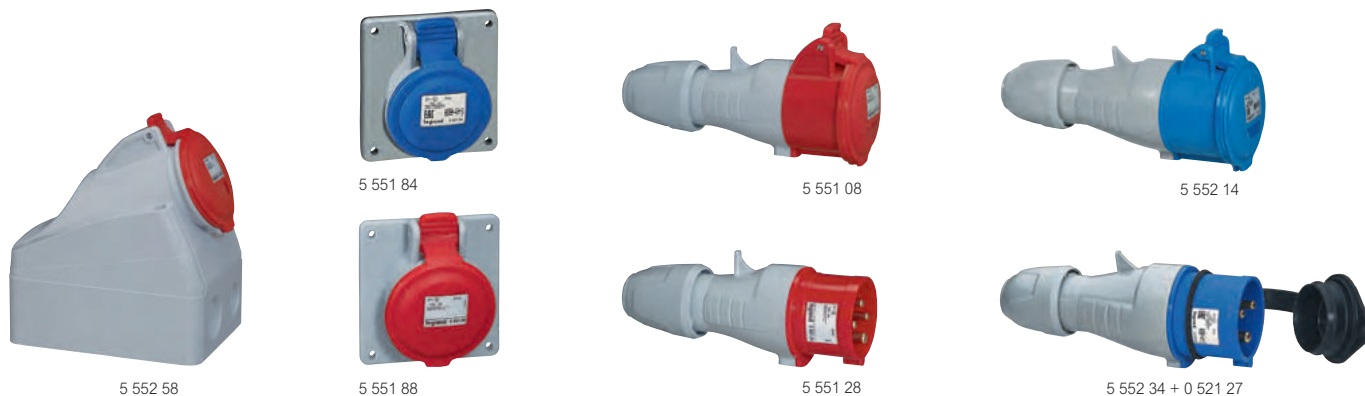

Technical characteristics p. 529 to 531

IK 09 except for surface mounting sockets IK 08
Material: Plastic

Pack	Cat.Nos		Surface mounting sockets
	IP 44		Two possible angles (5° or 25°)
	16 A	32 A	200/250 V ~
1015	5 551 54	5 552 54	2P+E
5	5 551 55	5 552 55	3P+E
5	5 551 56	5 552 56	3P+N+E
			380/415 V ~
5	5 551 57	5 552 57	2P+E
10	5 551 58	5 552 58	3P+E
10	5 551 59	5 552 59	3P+N+E

Pack	Cat.Nos		Panel mounting sockets inclined outlet
	IP 44		Can be fixed on plain or pre-drilled faceplates (p. 536) and on flush mounting boxes (p. 526)
	16 A	32 A	200/250 V ~
10	5 551 84	5 552 84	2P+E
5	5 551 85	5 552 85	3P+E
5	5 551 86	5 552 86	3P+N+E
			380/415 V ~
10	5 551 88	5 552 88	3P+E
10	5 551 89	5 552 89	3P+N+E

Pack	Cat.Nos		Panel mounting sockets straight outlet small flange
	IP 44		Can be fixed only on plain faceplates Cat.Nos 0 577 15/16 (p. 536)
	16 A	32 A	200/250 V ~
5	0 573 54	0 580 54	2P+E
			380/415 V ~
5	0 573 58	0 580 58	3P+E
5	0 573 59	0 580 59	3P+N+E

Pack	Cat.Nos		Interlocked switched sockets with small flange
	IP 44		Dimensions: 125 x 105 mm Can be fixed only on faceplate Cat.No 0 577 23 (p. 536)
	16 A		200/250 V ~
1	IP 44 0 573 00	IP 55 0 573 20	2P+E
			380/415 V ~
1	0 573 02	0 573 22	3P+N+E

Pack	Cat.Nos		Mobile sockets
	IP 44		Cable clamping and closing without screws Supplied unlocked
	16 A	32 A	200/250 V ~
10	5 551 04	5 552 14	2P+E
5	5 551 05	5 552 15	3P+E
5	5 551 06	5 552 16	3P+N+E
			380/415 V ~
5	5 551 07	5 552 17	2P+E
10	5 551 08	5 552 18	3P+E
10	5 551 09	5 552 19	3P+N+E

Pack	Cat.Nos		Straight plugs
	IP 44		Cable clamping and closing without screws Supplied unlocked
	16 A	32 A	200/250 V ~
10	5 551 24	5 552 34	2P+E
5	5 551 25	5 552 35	3P+E
5	5 551 26	5 552 36	3P+N+E
			380/415 V ~
5	5 551 27	5 552 37	2P+E
10	5 551 28	5 552 38	3P+E
10	5 551 29	5 552 39	3P+N+E

Pack	Cat.Nos		Phase inverter plugs
	IP 44		Straight plugs for changing rotation direction of a 3-phase electric motor
	16 A	32 A	380/415 V ~
5	0 574 40	0 581 40	3P+E
5	0 574 41	0 581 41	3P+N+E

Pack	Cat.Nos		Appliance inlets
	IP 44		200/250 V ~
5	16 A 0 575 84	32 A 0 582 84	2P+E
5	0 575 85		3P+E
5	0 575 86	0 582 86	3P+N+E
			380/415 V ~
5	0 575 88	0 582 88	3P+E
5	0 575 89	0 582 89	3P+N+E

Pack	Cat.Nos		Protection covers
	IP 44		IP 67 IP 44 maintained with the plug inserted
	Rubber		For plugs and appliance inlets:
10	0 521 25		2P+E - 16 A
5	0 521 26		3P+E - 16 A
5	0 521 27		3P+N+E - 16 A / 2P+E and 3P+E - 32 A
5	0 527 99		3P+N+E - 32 A