


Plexo™

Switches and push-buttons with indicator lights

Cat. No(s): 0 695 12/13/14/15/19/26/31/32/42/43/44/46
 0 696 12/13/14/15/19/26/32/33/34/36
 0 697 10/12/13/22/23
 0 698 21/24/61/64

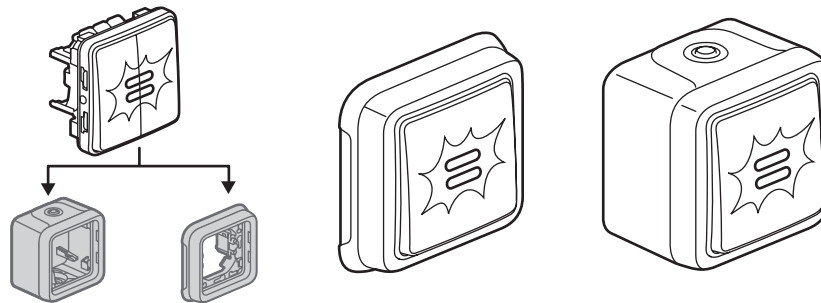


1. USE

Lighting control mechanisms with indicator/locator lights.
 Products are delivered with lamps fitted.

2. RANGE

Cat. No(s)	2 versions: Grey and White
0 695 xx 0 696 xx	Modular mechanisms
0 697 xx 0 698 xx	Surface-mounting, supplied complete Flush-mounting, supplied complete

3. DIMENSIONS (mm)

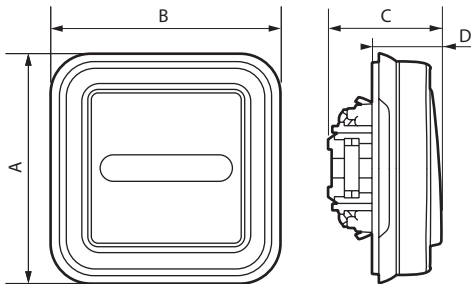

Cat. No(s)	A	B	C	D
0 695 12/13/14/15/31/32/42 0 696 12/13/14/15/32 0 695 43/44 - 0 696 33/34 0 695 19/26/36 - 0 696 19/26/36	64	64	40	-
0 697 10/12/13/22/23	84	80	57	-
0 698 21/61 0 698 24/64	86	86	42	23

4. CONNECTION

Type of terminals: automatic
 Terminals capacity: 2 x 1.5 mm² - 2 x 2.5 mm²
 Stripping length: 13 mm

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Protection against impact: IK 07
 Protection against solid/bodies and liquids: IP 55

5.2 Material characteristics

Box, support: PP (reinforced polypropylene)
 Front plate, rocker: ABS
 Entry gland, cover plate: PP + SEBS
 Mechanism: PC
 UV resistant
 Resistance to salt spray: 7 days (168 h)
 Colours: Grey matt RAL 7046
 White matt RAL 9114

Self-extinguishing:

850°C / 30 s for insulating components holding in place live parts.
 650°C / 30 s for the other insulating components

5.3 Electrical characteristics

Voltage: 230 V~
 Frequency: 50 Hz

Designation	References	Characteristics	Locator	Indicator
MODULAR MECHANISMS	0 695 42 - 0 696 32	10 A	■	
	0 695 13/31 - 0 696 13	10 AX	■	
	0 695 15 - 0 696 15	6 AX		■
	0 695 12/14/32 - 0 696 12/14	10 AX		■
MODULAR MECHANISMS	0 695 43 - 0 696 33	12 V	■	
	0 695 44 - 0 696 34	12 V	■	
	0 695 26 - 0 696 26 0 695 19 - 0 696 19 0 695 46 - 0 696 36	10 AX 10 A - 10 AX 10 A	■ ■ ■	
SUPPLIED COMPLETE	0 697 10/12 0 697 13 0 697 22 0 697 23	10 AX 10 AX 10 A 10 A	■ ■ ■ ■	■ ■
	0 698 21/61	10 A	■	
	0 698 24/64	12 V or 230 V~ (with 230 V lamp)	■	

Locator ■ green fluorescent lamp
 Indicator ■ orange neon lamp

5. TECHNICAL CHARACTERISTICS *(continued)*

■ 5.4 Climatic characteristics

Storage temperature: - 25° C to + 70° C

Use temperature: - 25° C to + 40° C

6. CLEANING

Surface cleaning with dry cloth or cloth dipped in soapy water.

Do not use acetone, tar remover or trichloroethylene.

Caution: A test should be carried out before using any specific cleaners.

7. ACCESSORIES

For indicator (orange) or locator (green) functions

0 694 96: 230 V - 1 mA green only for single push-button with locator

0 694 97: 230 V - 0.5 mA green

0 694 98: 230 V - 1 mA orange

0 694 99: 12 V - 15 mA green

0 694 95: 24 V - 20 mA green

8. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.