Ecobatibox

flush-mounting boxes for dry partitions

▪ Technical characteristics

Batibox boxes Cat.Nos 0 800 21/22/23/24/31/32/33/34

Wide space for wiring

Entries can be opened without tools by pulling the seal
Equipped with 4 entries (wide enough to also hold the conduits) suitable for Ø16, 20 and 25 mm conduits

Reinforced wide flange and clamps ensure boxes are held in place securely

- Flexible membrane ensures a totally weatherproof seal
- Suction membrane for holding the conduit
- IP 40
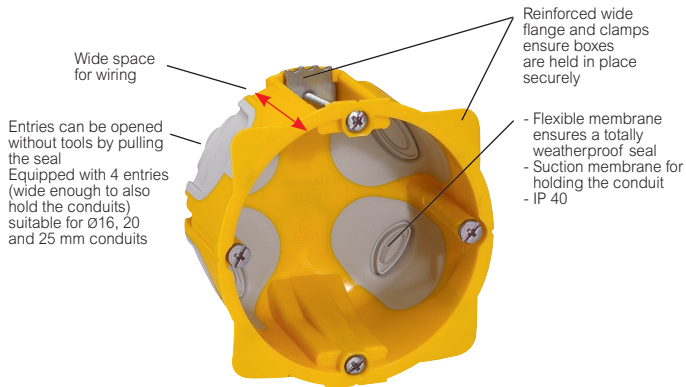
Covers fitted with a pierceable membrane for inserting wires
Minimise energy losses through the conduits
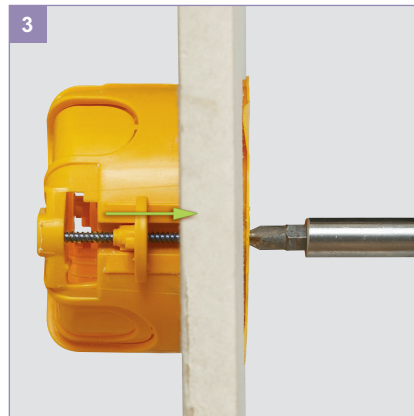Available in Ø16, 20, 25 and 32 mm

▪ Installation principle

Suspended ceiling

0 893 11

40 to 50 mm deep, 1 to 4-gang, depending on where they are installed

0 800 21

0 800 16

0 800 34

0 800 20

Batibox™

flush-mounting boxes for dry partitions

▪ Installation

1
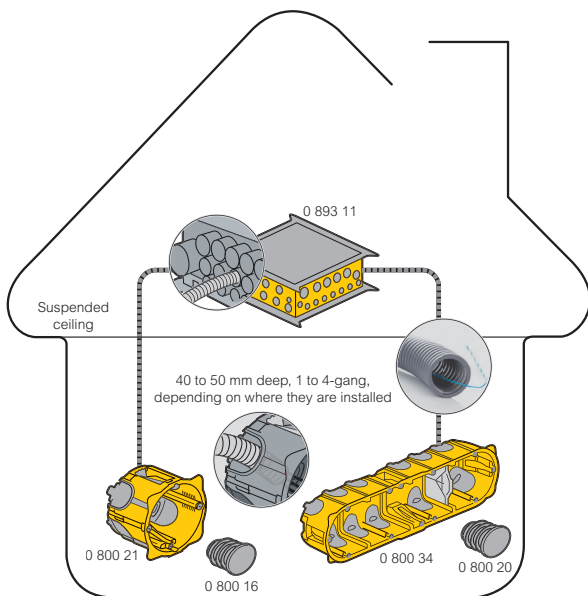
Hole cutter saw Ø67
Box Ø67 mm, more space for cabling

2

Retractable fixing claws for a better comfort during installation

3

Fixing claws adapted to the thickness of the wall
Automatic positioning, even with an electric screwdriver

4
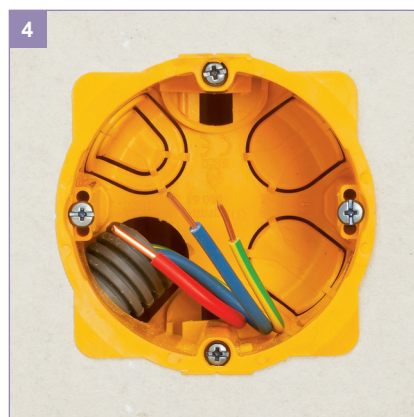
Large space to improve fixing (according to the drilling Ø67 to 68 mm)