



Legrand cabling system LCS³ cat. 5e equipment and accessories

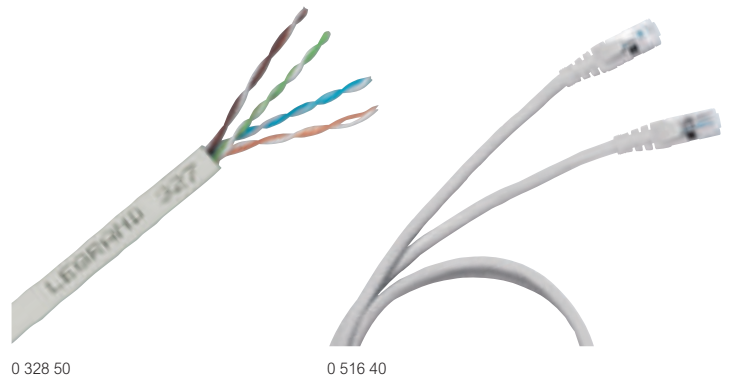

Legrand cabling system LCS³ category 5e cables and cords

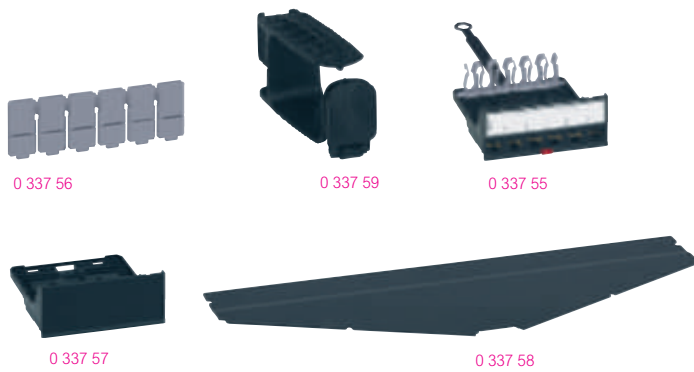

Pack	Cat.Nos	Common accessories for flat and angled panels
10	0 337 56	Port blanking modules Divisible 6 port blanking plate for sealing from 1 to 6 ports
1	0 337 59	Cord management For use with new generation Quick-Fix They provide side cord management
Specific accessories for flat panels		
1	0 337 55	Cassette for flat panels to be equipped Empty removable cassette to be equipped with connectors. Accepts 6 cat. 5e to cat. 8 connectors. Extraction by simple pressure of the cassette, making installation and maintenance easier Possibility of removing each connector individually
1	0 337 95	High density cassette for flat panels to be equipped Empty removable cassette to be equipped with connectors Accepts 12 cat. 5e to cat. 6 _A connectors Extraction by simple pressure of the cassette, making installation and maintenance easier Possibility of removing each connector individually
1	0 337 57	Blanking cassette To be used for blanking the panel
Specific accessories for angled panels		
1	0 337 58	Angled panel cover For optimised management of the air flow inside the cabinet

Pack	Cat.Nos	Cables for local networks cat. 5e
		4 twisted pair cables 100 ohms LSZH sleeve: non-halogen Grey RAL 7035 Colour code TIA/EIA
305 ¹	0 327 50	U/UTP - 4 pairs Length 305m Supplied in cardboard box. Weight 10 kg
500 ¹	0 328 53	U/UTP - 4 pairs Length 500 m Supplied on reel. Weight 15 kg
305 ¹	0 327 51	F/UTP - 4 pairs Length 305m Supplied in cardboard box. Weight 9 kg
305 ¹	0 327 52	F/UTP - 4 pairs Length 305 m Supplied in cardboard box. Weight 12 kg
500 ¹	0 328 50	F/UTP - 4 pairs Length 500 m Supplied on reel. Weight 21 kg
305 ¹	0 327 53	F/UTP - 4 pairs Length 305 m Supplied by box. Weight 11 kg
RJ 45 patch cords and user cords cat. 5e		
		RJ 45 - RJ 45 right
		U/UTP unshielded impedance 100 Ω
		Grey
1	0 518 17	Length 0.5 m
1	0 516 36	Length 1 m
1	0 516 37	Length 2 m
1	0 516 38	Length 3 m
1	0 516 39	Length 5 m
		F/UTP screened impedance 100 Ω
		Grey
1	0 518 14	Length 0.5 m
1	0 516 40	Length 1 m
1	0 516 41	Length 2 m
1	0 516 42	Length 3 m
1	0 516 43	Length 5 m

1: in metre(s)