


EIA Industrial Air-cooled Conditioner (500W)




Features:




- Intelligent inverter control, without transient electric current, up to 40 % less energy- consumption.
- Complete isolation inside and outside,dust-proof, oil&mist proof,moisture-proof etc.
- Compact size , Compatible with main models in the industry.
- Flexible working temperature adjustment from 15°C ~55°C.
- Chinese and English bilingual LCD display menu , easy access to parameter setting and alarm information checking.
- Providing MODBUS communication , with power on START-UP function.
- Dust-proof net plug,quick change conveniently.
- Condensate water treatment, efficient solution to the problem of condensate discharge.
- Nano coating, anti-corrosion ability.
- Selectable smoke, access control and flooding alarm.
- 7*24*365 uninterrupted operation for more than 10 years.



Side mounting




Installation opening size

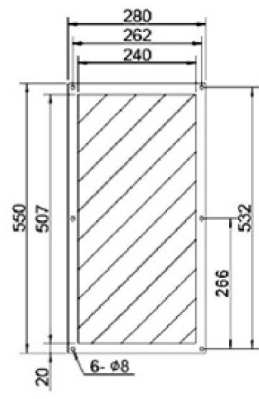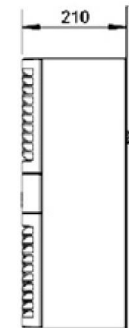

Products Specification


| Model | EIA05 |
|----------------------------------|-------------------------|
| External Dimension-Height(mm) | 550 |
| External Dimension-Width(mm) | 280 |
| Dimension-Depth(mm) | 210 |
| Quality-kg | <17 |
| Installation Mode | outdoor (side mounting) |
| Working Temperature- °C | -15 ~ +55 |
| Noise Level-dB(A) | 65 |
| IP protection class | IP54 |
| Refrigerant | R134a |
| Refrigerating capacity@L35/L35-W | 500/550 |
| Input power@L35/L35-W | 260/280 |
| Input current @L35/L35-A | 1.3/1.35 |
| Rated Voltage-V,Hz | 1~,220,50/60 |

EIA Industrial Air-cooled Conditioner (1000-2000W)



Features:

- Intelligent inverter control, without transient electric current, up to 40 % less energy- consumption.
- Complete isolation inside and outside,dust-proof, oil&mist proof,moisture-proof etc.
- Compact size , Compatible with main models in the industry.
- Flexible working temperature adjustment from 15°C ~55°C.
- Chinese and English bilingual LCD display menu , easy access to parameter setting and alarm information checking
- Providing MODBUS communication , with power on START-UP function.
- Dust-proof net plug,quick change conveniently.
- Condensate water treatment, efficient solution to the problem of condensate discharge.
- Nano coating, anti-corrosion ability.
- Selectable smoke, access control and flooding alarm.
- 7*24*365 uninterrupted operation for more than 10 years.

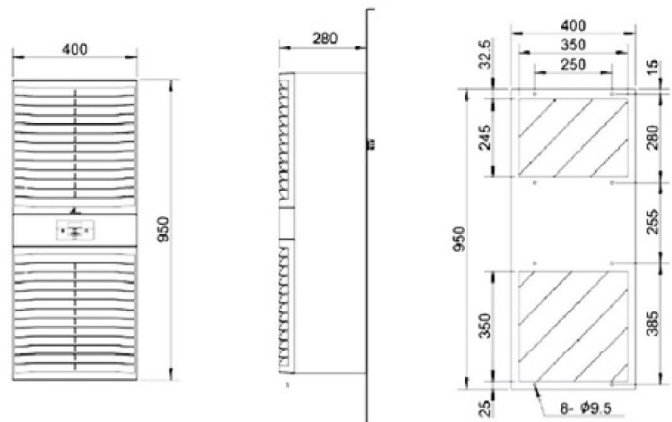

Products Specification

| Model | EIA10 | EIA15 | EIA20 |
|----------------------------------|-------------------------|-------------------------|-------------------------|
| External Dimension-Height(mm) | 950 | 950 | 950 |
| External Dimension-Width(mm) | 400 | 400 | 400 |
| Dimension-Depth(mm) | 280 | 280 | 280 |
| Quality-kg | <41 | <41 | <41 |
| Installation Mode | outdoor (side mounting) | outdoor (side mounting) | outdoor (side mounting) |
| Working Temperature- °C | -15~ +55 | -15 ~ +55 | -15~ +55 |
| Noise Level-dB(A) | 65 | 65 | 65 |
| IP protection class | IP 54 | IP 54 | IP 54 |
| Refrigerant | R134a | R134a | R134a |
| Refrigerating capacity@L35/L35-W | 1100/1300 | 1500/1700 | 2000/2100 |
| Input power@L35/L35-W | 540/680 | 750/900 | 1000/1200 |
| Input current @L35/L35-A | 2.5/3.2 | 3.5/4.2 | 4.6/5.7 |
| Rated Voltage-V,Hz | 1~,220,50/60 | 1~,220,50/60 | 1~,220,50/60 |

EIA Industrial Air-cooled Conditioner (4000W)




Features:

- Intelligent inverter control, without transient electric current, up to 40 % less energy- consumption.
- Complete isolation inside and outside,dust-proof, oil&mist proof,moisture-proof etc.
- Compact size , Compatible with main models in the industry.
- Flexible working temperature adjustment from 15℃~55℃.
- Chinese and English bilingual LCD display menu , easy access to parameter setting and alarm information checking.
- Providing MODBUS communication , with power on START-UP function.
- Dust-proof net plug,quick change conveniently.
- Condensate water treatment, efficient solution to the problem of condensate discharge.
- Nano coating, anti-corrosion ability.
- Selectable smoke, access control and flooding alarm.
- 7*24*365 uninterrupted operation for more than 10 years.


Products Specification

| | |
|----------------------------------|-------------------------------|
| Model | EIA40 |
| External Dimension-Height(mm) | 1580 |
| External Dimension-Width(mm) | 500 |
| Dimension-Depth(mm) | 340 |
| Quality-kg | 89 |
| Installation Mode | Side mounting / door mounting |
| Working Temperature- °C | -15 ~ +55 |
| Noise Level-dB(A) | 65 |
| IP protection class | IP54 |
| Refrigerant | R134a |
| Refrigerating capacity@L35/L35-W | 4000/4500 |
| Input power@L35/L35-W | 1900/2600 |
| Input current @L35/L35-A | 3.1/4.2 |
| Rated Voltage-V,Hz | 3~,380,50/60 |
| Air switch-P,A | 3,10 |


EIA Industrial Air-cooled Conditioner (4000W)

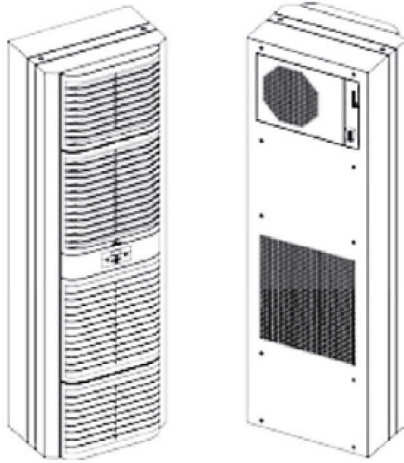


Side mounting

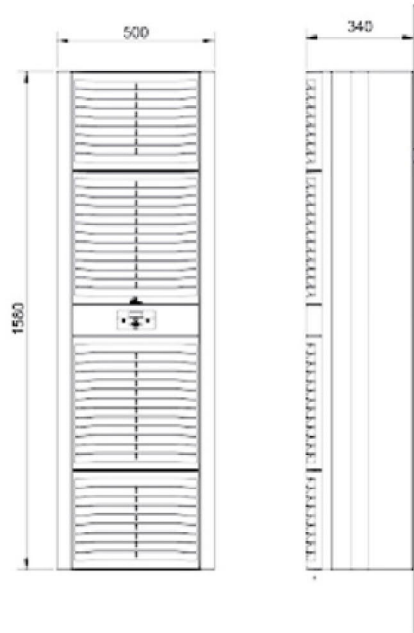

Installation opening size

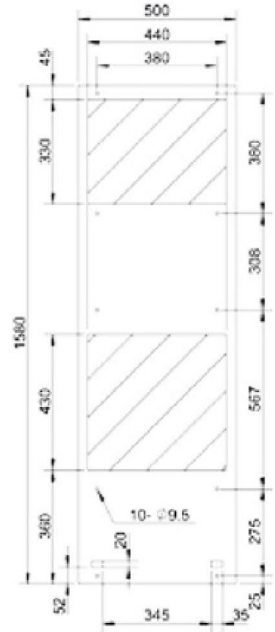

door mounting

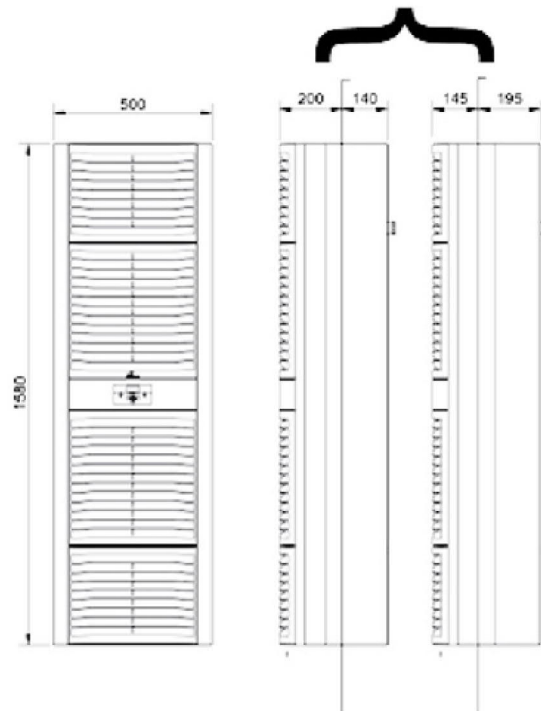

Installation opening Size

